

# Incremental encoders

<b>Standard high resolution, optical</b>	<b>5805 / 5825 (shaft / hollow shaft)</b>	<b>Push-pull / RS422</b>
--	---	--------------------------



The incremental encoders type 5805 / 5825 offer resolutions up to max. 36000 pulses per revolution.

They are thus perfect for use in applications where a very high level of accuracy is required.



High rotational speed	Temperature range -20°...+85°C	High protection level IP	High shaft load capacity	Shock / vibration resistant	Magnetic field proof	Short-circuit proof	Optical sensor

### High performance

- High shaft loading capability.
- Maximum speed up to 12000 revolutions per minute.
- High IP protection up to max. IP66.

### Many variants

- With RS422 or push-pull interface.
- With cable or connector.

<b>Order code</b>	<b>8.5805</b>	<b>.XXXXX</b>	<b>.XXXXX</b>
<b>Shaft version</b>	Type	a b c d	e

<p><b>a Flange</b></p> <p>1 = clamping flange ø 58 mm [2.28"] 2 = synchro flange ø 58 mm [2.28"]</p> <p><b>b Shaft (ø x L), with flat</b></p> <p>1 = ø 6 x 10 mm [0.24 x 0.39"] 2 = ø 10 x 20 mm [0.39 x 0.79"]</p>	<p><b>c Output circuit / supply voltage</b></p> <p>4 = RS422 (with inverted signal) / 5 V DC 5 = RS422 (with inverted signal) / 10 ... 30 V DC 6 = push-pull (with inverted signal) / 10 ... 30 V DC 7 = push-pull (without inverted signal) / 10 ... 30 V DC</p> <p><b>d Type of connection</b></p> <p>1 = axial cable, 1 m [3.28'] PUR A = axial cable, special length PUR *) 2 = radial cable, 1 m [3.28'] PUR B = radial cable, special length PUR *) 3 = axial M23 connector, 12-pin 5 = radial M23 connector, 12-pin T = axial M12 connector, 8-pin G = radial M12 connector, 8-pin</p> <p>*) Available special lengths (connection types A, B): 2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.5805.114A.6000.0030 (for cable length 3 m)</p>	<p><b>e Pulse rate</b></p> <p>6000, 7200, 8000, 8192, 9000, 10000, 18000, 36000 (e.g. 18000 pulses =&gt; 18000)</p> <p><i>Optional on request</i> - other pulse rates</p>
---	---	---

# Incremental encoders

<b>Standard high resolution, optical</b>	<b>5805 / 5825 (shaft / hollow shaft)</b>	<b>Push-pull / RS422</b>
--	---	--------------------------

<b>Order code</b>	<b>8.5825</b>	<b>.XXXXX</b>	<b>.XXXXX</b>
<b>Hollow shaft</b>	Type	a b c d	e

<p><b>a Flange</b></p> <p>1 = with hollow shaft and spring element, short          2 = with blind hollow shaft and spring element, short          3 = with hollow shaft and stator coupling, <math>\varnothing</math> 65 mm [2.56"]          4 = with blind hollow shaft and stator coupling, <math>\varnothing</math> 65 mm [2.56"]</p> <p><b>b Hollow shaft (insertion depth blind hollow shaft with flange 2 and 4 max. 30 mm [1.18"])</b></p> <p>1 = <math>\varnothing</math> 6 mm [0.24"], IP40          2 = <math>\varnothing</math> 6 mm [0.24"], IP66          3 = <math>\varnothing</math> 8 mm [0.32"], IP40          4 = <math>\varnothing</math> 8 mm [0.32"], IP66          5 = <math>\varnothing</math> 10 mm [0.39"], IP40          6 = <math>\varnothing</math> 10 mm [0.39"], IP66          7 = <math>\varnothing</math> 12 mm [0.47"], IP40          8 = <math>\varnothing</math> 12 mm [0.47"], IP66</p>	<p><b>c Output circuit / supply voltage</b></p> <p>1 = RS422 (with inverted signal) / 5 V DC          4 = RS422 (with inverted signal) / 10 ... 30 V DC          2 = push-pull (without inverted signal) / 10 ... 30 V DC          3 = push-pull (with inverted signal) / 10 ... 30 V DC</p> <p><b>d Type of connection</b></p> <p>1 = radial cable, 1 m [3.28'] PVC          A = radial cable, special length PVC *)          2 = radial M23 connector, 12-pin          C = radial M12 connector, 8-pin</p> <p>*) Available special lengths (connection types A):          2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']          order code expansion .XXXX = length in dm          ex.: 8.5825.114A.6000.0030 (for cable length 3 m)</p>	<p><b>e Pulse rate</b></p> <p>6000, 7200, 8000, 8192,          9000, 10000, 18000, 36000          (e.g. 18000 pulses =&gt; 18000)</p> <p><i>Optional on request</i>          - other pulse rates</p>
---	--	--

<b>Mounting accessory for shaft encoders</b>	Order no.
--	-----------

<b>Coupling</b>	bellows coupling $\varnothing$ 19 mm [0.75"] for shaft 6 mm [0.24"]	<b>8.0000.1102.0606</b>
	bellows coupling $\varnothing$ 19 mm [0.75"] for shaft 10 mm [0.39"]	<b>8.0000.1102.1010</b>

<b>Mounting accessory for hollow shaft encoders</b>	Dimensions in mm [inch]	Order no.
---	-------------------------	-----------

<b>Torque pin, <math>\varnothing</math> 4 mm</b>	with fixing thread	<b>8.0010.4700.0000</b>
--	--------------------	-------------------------

for flange with spring element  
(flange type 1 + 2)

<b>Stator coupling, <math>\varnothing</math> 63 mm [2.48"]</b>		<b>8.0010.4D00.0000</b>
--	--	-------------------------

<b>Cables and connectors</b>		Order no.
------------------------------	--	-----------

<b>Preassembled cables</b>	M12 female connector with coupling nut, 8-pin, A coded, straight single ended 2 m [6.56'] PVC cable	<b>05.00.6041.8211.002M</b>
	M23 female connector with coupling nut, 12-pin, cw single ended 2 m [6.56'] PUR cable	for 5805 <b>8.0000.6101.0002</b>
	M23 female connector with coupling nut, 12-pin, cw single ended 2 m [6.56'] PVC cable	for 5825 <b>8.0000.6901.0002</b>
	M12 female connector with coupling nut, 8-pin, A coded, straight (metal)	<b>05.CMB 8181-0</b>
<b>Connectors</b>	M23 female connector with coupling nut, 12-pin, cw	<b>8.0000.5012.0000</b>

Further Kübler accessories can be found at: [kuebler.com/accessories](http://kuebler.com/accessories)  
 Further Kübler cables and connectors can be found at: [kuebler.com/connection-technology](http://kuebler.com/connection-technology)

# Incremental encoders

<b>Standard high resolution, optical</b>	<b>5805 / 5825 (shaft / hollow shaft)</b>	<b>Push-pull / RS422</b>
--	---	--------------------------

## Technical data

Mechanical characteristics		
<b>Speed</b>	shaft IP65	12000 min <sup>-1</sup>
	hollow shaft IP40	12000 min <sup>-1</sup>
	hollow shaft IP66 <sup>1)</sup>	6000 min <sup>-1</sup>
<b>Mass moment of inertia</b>	shaft	approx. 1.8 x 10 <sup>-6</sup> kgm <sup>2</sup>
	hollow shaft	approx. 6.0 x 10 <sup>-6</sup> kgm <sup>2</sup>
<b>Starting torque – at 20 °C [68 °F]</b>	shaft IP65 / hollow shaft IP40	< 0.01 Nm
	hollow shaft IP66	< 0.05 Nm
<b>Load capacity of shaft</b>	radial	80 N
	axial	40 N
<b>Weight</b>		approx. 0.4 kg [14.11 oz]
<b>Protection</b> acc. to EN 60529	shaft	IP65
	hollow shaft without seal	IP40
	hollow shaft with seal	IP66
<b>Working temperature range</b>	shaft IP65 / hollow shaft IP40	-20 °C ... +105 °C [-4 °F ... +221 °F]
	hollow shaft IP66	-20 °C ... +90 °C [-4 °F ... +194 °F]
<b>Material</b>	shaft	stainless steel H7
<b>Shock resistance</b> acc. to EN 60068-2-27		1000 m/s <sup>2</sup> , 6 ms
<b>Vibration resistance</b> acc. to EN 60068-2-6		100 m/s <sup>2</sup> , 10 ... 2000 Hz

Approvals	
<b>UL compliant</b> in accordance with	File no. E224618
<b>CE compliant</b> in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU

Electrical characteristics			
Output circuit		RS422 (TTL compatible)	Push-pull
<b>Supply voltage</b>		5 V DC (±5 %) or 10 ... 30 V DC	10 ... 30 V DC
<b>Power consumption</b> (no load)	without inverted signal	–	typ. 90 mA / max. 135 mA
	with inverted signal	typ. 70 mA / max. 120 mA	typ. 115 mA / max. 160 mA
<b>Permissible load / channel</b>		max. +/- 20 mA	max. +/- 30 mA
<b>Pulse frequency</b>		max. 800 kHz	max. 600 kHz
<b>Signal level</b>	HIGH	min. 2.5 V	min. +V - 2.5 V
	LOW	max. 0.5 V	max. 2.0 V
<b>Rising edge time t<sub>r</sub></b>		max. 200 ns	max. 1 μs
<b>Falling edge time t<sub>f</sub></b>		max. 200 ns	max. 1 μs
<b>Short circuit proof outputs</b> <sup>2)</sup>		yes <sup>3)</sup>	yes
<b>Reverse polarity protection of the supply voltage</b>		no; 10 ... 30 V DC: yes	yes

1) For continuous operation max. 3000 min<sup>-1</sup>, ventilated.  
 2) If supply voltage correctly applied.  
 3) Only one channel allowed to be shorted-out  
 at +V = 5 V DC short circuit to channel, 0 V, or +V is permitted.  
 at +V = 10 ... 30 V DC short circuit to channel or 0 V is permitted.

# Incremental encoders

<b>Standard high resolution, optical</b>	<b>5805 / 5825 (shaft / hollow shaft)</b>	<b>Push-pull / RS422</b>
--	---	--------------------------


## Terminal assignment

Output circuit	Type / Type of connection	Cable (isolate unused cores individually before initial start-up)											
1, 2, 3, 4, 5, 6, 7	5805: 1, 2, A, B	Signal:	0 V	+V	0Vsens <sup>2)</sup>	+Vsens <sup>2)</sup>	A	$\bar{A}$	B	$\bar{B}$	0	$\bar{0}$	$\perp$
		Core color:	WH 0,5 mm <sup>2</sup>	BN 0,5 mm <sup>2</sup>	WH	BN	GN	YE	GY	PK	BU	RD	shield
1, 2, 3, 4, 5, 6, 7	5825: 1, A	Signal:	0 V	+V	0Vsens <sup>2)</sup>	+Vsens <sup>2)</sup>	A	$\bar{A}$	B	$\bar{B}$	0	$\bar{0}$	$\perp$
		Core color:	WH	BN	GY/PK	BU/RD	GN	YE	GY	PK	BU	RD	shield
1, 2, 3, 4, 5, 6, 7	5805: 3, 5 5825: 2	M23 connector, 12-pin											
		Signal:	0 V	+V	0Vsens <sup>2)</sup>	+Vsens <sup>2)</sup>	A	$\bar{A}$	B	$\bar{B}$	0	$\bar{0}$	$\perp$
		Pin:	10	12	11	2	5	6	8	1	3	4	PH <sup>1)</sup>
1, 2, 3, 4, 5, 6, 7	5805: G, T 5825: C	M12 connector, 8-pin											
		Signal:	0 V	+V	0Vsens <sup>2)</sup>	+Vsens <sup>2)</sup>	A	$\bar{A}$	B	$\bar{B}$	0	$\bar{0}$	$\perp$
		Pin:	1	2			3	4	5	6	7	8	PH <sup>1)</sup>


Using RS422 outputs and long cable distances, a wave impedance has to be applied at each cable end.

- +V: Supply voltage encoder +V DC
- 0 V: Supply voltage encoder ground GND (0 V)
- 0 Vsens / +Vsens: Using the sensor outputs of the encoder, the voltage present can be measured and if necessary increased accordingly.
- A,  $\bar{A}$ : Incremental output channel A
- B,  $\bar{B}$ : Incremental output channel B
- 0,  $\bar{0}$ : Reference signal
- PH  $\perp$ : Plug connector housing (shield)

## Top view of mating side, male contact base



M23 connector, 12-pin



M12 connector, 8-pin

1) PH = shield is attached to connector housing.

2) The sensor cables are connected to the supply voltage internally. If long feeder cables are involved they can be used to adjust or control the voltage at the encoder.

# Incremental encoders

<b>Standard high resolution, optical</b>	<b>5805 / 5825 (shaft / hollow shaft)</b>	<b>Push-pull / RS422</b>
--	---	--------------------------


## Dimensions shaft version

Dimensions in mm [inch]

### Clamping flange, $\varnothing$ 58 [2.28]

#### Flange type 1

1 3 x M3, 5 [0.2] deep

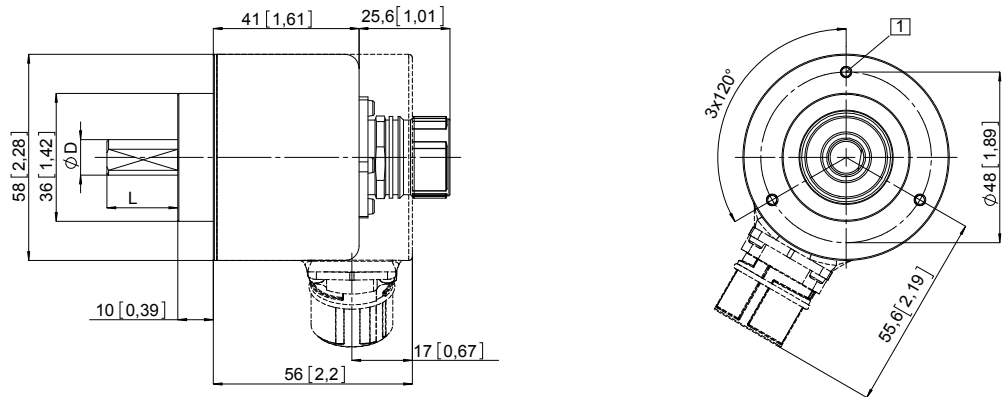


D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]

### Synchro flange, $\varnothing$ 58 [2.28]

#### Flange type 2

1 3 x M4, 5 [0.2] deep

$R_{min}$ :  
 - securely installed: 55 [2.17]  
 - flexibly installed: 70 [2.76]

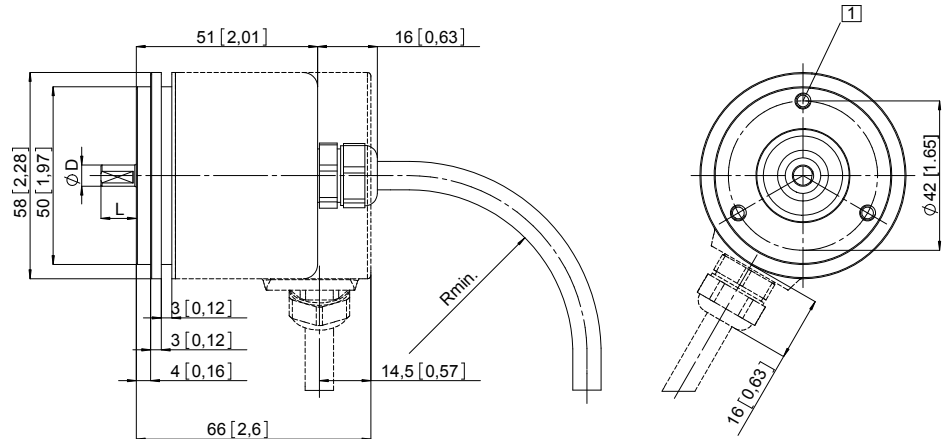

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]

# Incremental encoders

**Standard**  
**high resolution, optical**

**5805 / 5825 (shaft / hollow shaft)**


**Push-pull / RS422**

## Dimensions hollow shaft version

Dimensions in mm [inch]

### Flange with spring element, short Flange type 1 and 2

- 1 3 x M3, 5 [0.2] deep
- 2 Recommended torque for the clamping ring 0.6 Nm

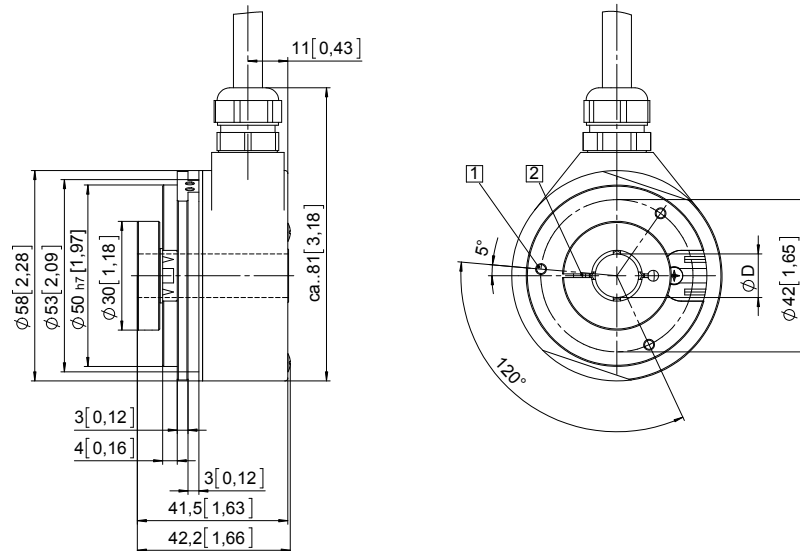


D	Fit
6 [0.24]	H7
8 [0.32]	H7
10 [0.39]	H7
12 [0.47]	H7

Insertion depth blind hollow shaft with flange 2:  
max. 30 mm [1.18"]

### Flange with stator coupling, Ø 65 [2.56] Flange type 3 and 4

- 1 Recommended torque for the clamping ring 0.6 Nm

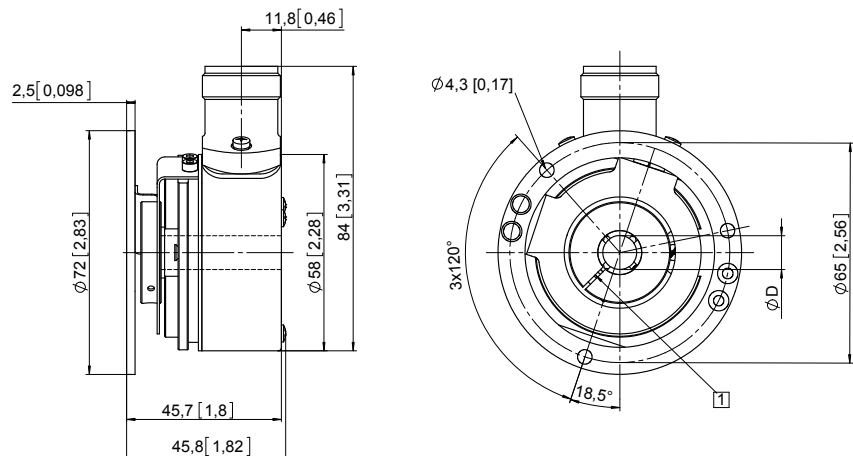

D	Fit
6 [0.24]	H7
8 [0.32]	H7
10 [0.39]	H7
12 [0.47]	H7

Min. insertion depth = 1.5 x D  
Insertion depth blind hollow shaft with flange 4:  
max. 30 mm [1.18"]