

pro NEW



PSFNpro

The precision gearbox with flange output shaft for complex and dynamic applications

The high-torque and extremely torsion-resistant **PSFNpro** combines maximum precision and power in the smallest of spaces. Its short overall length allows for space-saving integration, and the standardized flange output shaft guarantees secure installation in a wide variety of applications.

Cyclic torque **14 - 1800 Nm**

Radial force **1450 - 23000 N**

Axial force **2350 - 12000 N**

Torsional backlash **1 - 8 arcmin**

Protection class **IP65**

Frame sizes


- 55
- 64
- 90
- 110
- 140
- 200



Precision Line



Equidirectional rotation



Extra large round type output flange




Rotary shaft seal



Planet carrier in cage design



Option: Rack and pinion
Planetary gearbox (Details on page 158)



Coaxial gearbox



Helical gear



Preloaded angular contact roller bearings



Flange output shaft (ISO 9409-1)



Option: Reduced backlash



Option: Painted surface
– RAL 9005 Jet black

Detailed explanations of the technical features starting on page 201.

| Code | Gearbox characteristics | | | PSFNpro055 | PSFNpro064 | PSFNpro090 | PSFNpro110 | PSFNpro140 | PSFNpro200 | p ⁽¹⁾ |
|----------|------------------------------------|------------------|---|--------------------------|---|----------------------------|----------------------------|--------------------------------|--------------------------------|------------------|
| | Service life ⁽²⁾ | L _h | h | 20,000 | | | | | | |
| | Efficiency ⁽³⁾ | η | % | 97 | | | | | | 1 |
| | | | | 95 | | | | | | 2 |
| | Min. operating temperature | T _{min} | °C | -25 (-13) | | | | | | |
| | Max. operating temperature | T _{max} | (°F) | 90 (194) | | | | | | |
| | Protection class | | | | IP65 | | | | | |
| S | Standard lubrication | | | | Oil (lifetime lubrication) | | | | | |
| F | Food grade lubrication | | | | Oil (lifetime lubrication) | | | | | |
| | Installation position | | | | Any | | | | | |
| S | Standard backlash | φ | arcmin | < 6 | < 3 | < 3 | < 3 | < 3 | < 3 | 1 |
| | | | | < 8 | < 5 | < 5 | < 5 | < 5 | < 5 | 2 |
| R | Reduced backlash | φ | arcmin | < 4 | < 2 | < 1 | < 1 | < 1 | < 1 | 1 |
| | | | | < 6 | < 3 | < 1 | < 1 | < 1 | < 1 | 2 |
| | Torsional stiffness ⁽³⁾ | C _{2t} | Nm / arcmin (lb _i .in / arcmin) | 2.4 - 4.8 (21 - 42) | 8.3 - 12.8 (73 - 113) | 21.5 - 32.0 (190 - 283) | 64.0 - 81.0 (566 - 717) | 129.0 - 218.0 (1142 - 1929) | 374.0 - 602.0 (3310 - 5328) | 1 |
| | | | | 2.5 - 4.9 (22 - 43) | 7.2 - 12.2 (64 - 108) | 21.0 - 31.5 (186 - 279) | 64.0 - 83.0 (566 - 735) | 127.0 - 206.0 (1124 - 1823) | 365.0 - 668.0 (3231 - 5912) | 2 |
| | Gearbox weight ⁽³⁾ | m | kg (lb _m) | 0.7 - 0.8 (1.6 - 1.7) | 1.6 (3.5) | 3.5 - 3.6 (7.7 - 7.9) | 5.2 - 5.3 (11.4 - 11.8) | 11.5 - 11.7 (25.3 - 25.9) | 28.1 - 29.1 (62.0 - 64.2) | 1 |
| | | | | 1.1 (2.4) | 1.6 - 1.7 (3.5 - 3.6) | 3.6 - 3.7 (8.0 - 8.2) | 6.5 - 6.7 (14.3 - 14.7) | 12.7 - 13.1 (28.0 - 28.9) | 31.2 - 32.5 (68.9 - 71.7) | 2 |
| S | Standard surface | | | | Housing: Steel – heat-treated and post-oxidized (black) | | | | | |
| B | Painted surface ⁽⁴⁾ | | | | RAL 9005 Jet black | | | | | |
| | Running noise ⁽⁵⁾ | L _{pA} | dB(A) | 56 | 57 | 58 | 63 | 66 | 68 | |

| Output shaft loads | | | PSFNpro055 | PSFNpro064 | PSFNpro090 | PSFNpro110 | PSFNpro140 | PSFNpro200 | p ⁽¹⁾ |
|------------------------|--------------------|-----------------------------|------------|------------|-------------|-------------|--------------|--------------|------------------|
| Maximum radial force | F _{r max} | N | 1450 (326) | 2150 (483) | 3950 (888) | 4900 (1102) | 12000 (2698) | 23000 (5171) | |
| Maximum axial force | F _{a max} | (lb _i) | 2350 (528) | 2850 (641) | 5450 (1225) | 6450 (1450) | 7500 (1686) | 12000 (2698) | |
| Maximum tilting moment | M _{K max} | Nm (lb _i .in) | 75 (667) | 132 (1170) | 326 (2888) | 475 (4207) | 1030 (9113) | 2445 (21639) | |

| Input characteristics | | | PSFNpro055 | PSFNpro064 | PSFNpro090 | PSFNpro110 | PSFNpro140 | PSFNpro200 | p ⁽¹⁾ |
|--|-----------------|---|----------------------------------|----------------------------------|----------------------------------|------------------------------------|------------------------------------|--|------------------|
| Clamping system diameter input (Code) | D26 | mm (in) | 11 (C) ⁽⁵⁾ | 11 (C) | 14 (D) | 19 (E) | 35 (G) ⁽⁵⁾ | 48 (K) ⁽⁵⁾ | 1 |
| | | | 14 (D) | 14 (D) ⁽⁵⁾ | 19 (E) ⁽⁵⁾ | 24 (F) ⁽⁵⁾ | 42 (H) | - | |
| | | | - | 19 (E) | 24 (F) | 35 (G) | - | - | 2 |
| | | | 11 (C) ⁽⁵⁾ | 11 (C) ⁽⁵⁾ | 11 (C) | 14 (D) | 19 (E) | 35 (G) ⁽⁵⁾ | |
| | | | 14 (D) | 14 (D) | 14 (D) ⁽⁵⁾ | 19 (E) ⁽⁵⁾ | 24 (F) ⁽⁵⁾ | 42 (H) | |
| Mass moment of inertia input ⁽³⁾⁽⁵⁾ | J _i | kgcm ² (lb _i .in.s ² 10 ⁻⁴) | 0.097 - 0.117 (0.859 - 1.036) | 0.149 - 0.210 (1.319 - 1.859) | 0.450 - 0.719 (3.983 - 6.364) | 1.180 - 2.029 (10.444 - 17.958) | 6.526 - 9.670 (57.760 - 85.587) | 22.520 - 40.642 (199.319 - 359.712) | 1 |
| | | | 0.095 - 0.109 (0.841 - 0.965) | 0.096 - 0.151 (0.850 - 1.336) | 0.147 - 0.219 (1.301 - 1.938) | 0.435 - 0.697 (3.850 - 6.169) | 1.144 - 2.127 (10.125 - 18.826) | 6.434 - 10.410 (56.946 - 92.136) | 2 |
| Average idle torque ⁽³⁾⁽⁵⁾ | T ₀ | Nm (lb _i .in) | 0.20 - 0.45 (2 - 4) | 0.25 - 0.55 (2 - 5) | 0.60 - 1.35 (5 - 12) | 1.05 - 2.70 (9 - 24) | 3.15 - 8.90 (28 - 79) | 7.95 - 24.20 (70 - 214) | 1 |
| | | | 0.15 - 0.25 (1 - 2) | 0.15 - 0.30 (1 - 3) | 0.25 - 0.50 (2 - 4) | 0.50 - 1.15 (4 - 10) | 0.85 - 2.80 (8 - 25) | 2.10 - 6.70 (19 - 59) | 2 |
| Max. bending moment based on the gearbox input flange | M _{b1} | | 10 (89) | 18 (159) | 38 (336) | 80 (708) | 180 (1593) | 300 (2655) | 1 |
| | | | 10 (89) | 18 (159) | 18 (159) | 38 (336) | 80 (708) | 180 (1593) | 2 |

(1) Number of stages

(2) Application specific configuration with NCP – www.neugart.com

(3) The ratio-dependent values can be retrieved in Tec Data Finder – www.neugart.com

(4) More information on page 183

(5) Reference clamping system diameter

| Output torques | | | PSFNpro055 | PSFNpro064 | PSFNpro090 | PSFNpro110 | PSFNpro140 | PSFNpro200 | i ⁽¹⁾ | p ⁽²⁾ |
|-----------------------------------|-------------------|-----------------------------|------------|------------|------------|------------|-------------|--------------|------------------|------------------|
| Cyclic torque ^{(3)/(4)} | T _{zz} | Nm (lb _f .in) | 25 (221) | 68 (602) | 150 (1328) | 330 (2921) | 700 (6196) | 1480 (13099) | 4 | 1 |
| | | | 25 (221) | 68 (602) | 150 (1328) | 330 (2921) | 850 (7523) | 1800 (15931) | 5 | |
| | | | 18.5 (164) | 45 (398) | 108 (956) | 300 (2655) | 600 (5310) | 1450 (12834) | 7 | |
| | | | 18 (159) | 40 (354) | 84 (743) | 190 (1682) | 425 (3762) | - | 8 | |
| | | | 13.5 (119) | 32 (283) | 72 (637) | 190 (1682) | 315 (2788) | 850 (7523) | 10 | 2 |
| | | | 25 (221) | 68 (602) | 150 (1328) | 330 (2921) | 850 (7523) | 1800 (15931) | 16 | |
| | | | 25 (221) | 68 (602) | 150 (1328) | 330 (2921) | 850 (7523) | 1800 (15931) | 20 | |
| | | | 25 (221) | 68 (602) | 150 (1328) | 330 (2921) | 850 (7523) | 1800 (15931) | 25 | |
| | | | 25 (221) | 68 (602) | 150 (1328) | 330 (2921) | 850 (7523) | 1800 (15931) | 35 | |
| | | | 25 (221) | 68 (602) | 150 (1328) | 330 (2921) | 850 (7523) | 1800 (15931) | 40 | |
| | | | 25 (221) | 67 (593) | 150 (1328) | 330 (2921) | 850 (7523) | 1580 (13984) | 50 | |
| | | | 18.5 (164) | 44 (389) | 108 (956) | 300 (2655) | 600 (5310) | 1450 (12834) | 70 | |
| | | | 13.5 (119) | 32 (283) | 72 (637) | 190 (1682) | 315 (2788) | 850 (7523) | 100 | |
| Maximum torque ^{(3)/(4)} | T _{2max} | Nm (lb _f .in) | 40 (354) | 83 (735) | 200 (1770) | 400 (3540) | 700 (6196) | 1480 (13099) | 4 | 1 |
| | | | 40 (354) | 79 (699) | 184 (1629) | 440 (3894) | 870 (7700) | 1850 (16374) | 5 | |
| | | | 29 (257) | 59 (522) | 167 (1478) | 395 (3496) | 800 (7081) | 1680 (14869) | 7 | |
| | | | 28 (248) | 64 (566) | 134 (1186) | 295 (2611) | 490 (4337) | - | 8 | |
| | | | 21 (186) | 52 (460) | 116 (1027) | 280 (2478) | 500 (4425) | 1050 (9293) | 10 | 2 |
| | | | 40 (354) | 83 (735) | 220 (1947) | 520 (4602) | 1030 (9116) | 2210 (19560) | 16 | |
| | | | 40 (354) | 83 (735) | 220 (1947) | 520 (4602) | 1030 (9116) | 2210 (19560) | 20 | |
| | | | 40 (354) | 79 (699) | 184 (1629) | 440 (3894) | 1070 (9470) | 1960 (17347) | 25 | |
| | | | 40 (354) | 79 (699) | 184 (1629) | 440 (3894) | 1070 (9470) | 1960 (17347) | 35 | |
| | | | 40 (354) | 79 (699) | 184 (1629) | 440 (3894) | 1070 (9470) | 1960 (17347) | 40 | |
| | | | 40 (354) | 79 (699) | 184 (1629) | 440 (3894) | 1070 (9470) | 1960 (17347) | 50 | |
| | | | 29 (257) | 51 (451) | 167 (1478) | 395 (3496) | 800 (7081) | 1680 (14869) | 70 | |
| | | | 21 (186) | 52 (460) | 116 (1027) | 280 (2478) | 500 (4425) | 1050 (9293) | 100 | |

⁽¹⁾ Ratios (i=n₁/n₂)
⁽²⁾ Number of stages
⁽³⁾ Application specific configuration with NCP – www.neugart.com
⁽⁴⁾ Based on reference clamping system diameter




| Output torques | | | PSFNpro055 | PSFNpro064 | PSFNpro090 | PSFNpro110 | PSFNpro140 | PSFNpro200 | i ⁽¹⁾ | p ⁽²⁾ |
|----------------------------------|-----------------|-----------------------------|------------|------------|------------|------------|------------|--------------|------------------|------------------|
| Continuous torque ⁽³⁾ | T _{2D} | Nm (lb _f .in) | 19.5 (173) | 36 (319) | 85 (752) | 184 (1629) | 620 (5487) | 1350 (11949) | 4 | 1 |
| | | | 18.5 (164) | 35 (310) | 76 (673) | 161 (1425) | 580 (5133) | 1200 (10621) | 5 | |
| | | | 15.5 (137) | 37 (327) | 77 (682) | 152 (1345) | 510 (4514) | 1060 (9382) | 7 | |
| | | | 15 (133) | 34 (301) | 71 (628) | 150 (1328) | 425 (3762) | - | 8 | |
| | | | 11 (97) | 27 (239) | 61 (540) | 159 (1407) | 315 (2788) | 720 (6373) | 10 | |
| | | | 25 (221) | 53 (469) | 79 (699) | 186 (1646) | 540 (4779) | 1670 (14781) | 16 | |
| | | 2 | 25 (221) | 57 (504) | 87 (770) | 190 (1682) | 540 (4779) | 1660 (14692) | 20 | |
| | | | 25 (221) | 57 (504) | 76 (673) | 164 (1452) | 445 (3939) | 1500 (13276) | 25 | |
| | | | 25 (221) | 61 (540) | 89 (788) | 190 (1682) | 475 (4204) | 1520 (13453) | 35 | |
| | | | 25 (221) | 61 (540) | 94 (832) | 200 (1770) | 500 (4425) | 0 (0) | 40 | |
| | | | 25 (221) | 57 (504) | 103 (912) | 220 (1947) | 550 (4868) | 1580 (13984) | 50 | |
| | | | 15.5 (137) | 40 (354) | 92 (814) | 220 (1947) | 510 (4514) | 1230 (10886) | 70 | |
| | | | 11 (97) | 27 (239) | 61 (540) | 162 (1434) | 315 (2788) | 720 (6373) | 100 | |

| Input speeds | | | PSFNpro055 | PSFNpro064 | PSFNpro090 | PSFNpro110 | PSFNpro140 | PSFNpro200 | i ⁽¹⁾ | p ⁽²⁾ |
|--|-------------------|-----|------------|------------|------------|------------|------------|------------|------------------|------------------|
| Continuous input speed ⁽³⁾⁽⁴⁾ | n _{1D} | rpm | 3450 | 4150 | 2700 | 1950 | 910 | 490 | 4 | 1 |
| | | | 3950 | 4500 | 3450 | 2550 | 1200 | 700 | 5 | |
| | | | 4500 | 4500 | 4000 | 3500 | 1750 | 1000 | 7 | |
| | | | 5000 | 4500 | 4000 | 3500 | 2000 | - | 8 | |
| | | | 5000 | 4500 | 4000 | 3500 | 2400 | 1400 | 10 | |
| | | | 4250 | 4500 | 4500 | 3350 | 1800 | 980 | 16 | |
| | | 2 | 4800 | 4500 | 4500 | 4000 | 2250 | 1250 | 20 | |
| | | | 5000 | 4500 | 4500 | 4000 | 2950 | 1650 | 25 | |
| | | | 5000 | 4500 | 4500 | 4000 | 3500 | 2250 | 35 | |
| | | | 5000 | 4500 | 4500 | 4000 | 3500 | 2900 | 40 | |
| | | | 5000 | 4500 | 4500 | 4000 | 3500 | 2750 | 50 | |
| | | | 5000 | 4500 | 4500 | 4000 | 3500 | 3000 | 70 | |
| | | | 5000 | 4500 | 4500 | 4000 | 3500 | 3000 | 100 | |
| Max. mechanical input speed ⁽³⁾ | n _{1max} | rpm | 10000 | 10000 | 10000 | 8500 | 6500 | 6000 | | 1 |
| | | | 10000 | 10000 | 10000 | 10000 | 8500 | 6500 | | 2 |

| Output torques | | | PSFNpro055 | PSFNpro064 | PSFNpro090 | PSFNpro110 | PSFNpro140 | PSFNpro200 | i ⁽¹⁾ | p ⁽²⁾ |
|---|--------------------|-----------------------------|------------|------------|------------|------------|--------------|--------------|------------------|------------------|
| Emergency stop torque ⁽⁴⁾⁽⁵⁾ | T _{2Stop} | Nm (lb _f .in) | 55 (487) | 150 (1328) | 280 (2478) | 650 (5753) | 1400 (12391) | 2960 (26198) | 4 | 1 |
| | | | 55 (487) | 150 (1328) | 300 (2655) | 650 (5753) | 1750 (15489) | 3600 (31863) | 5 | |
| | | | 55 (487) | 102 (903) | 255 (2257) | 650 (5753) | 1390 (12303) | 3240 (28676) | 7 | |
| | | | 50 (443) | 117 (1036) | 295 (2611) | 500 (4425) | 850 (7523) | - | 8 | |
| | | | 24 (212) | 61 (540) | 141 (1248) | 345 (3054) | 740 (6550) | 1830 (16197) | 10 | |
| | | | 55 (487) | 150 (1328) | 300 (2655) | 650 (5753) | 1780 (15754) | 3600 (31863) | 16 | |
| | | 2 | 55 (487) | 150 (1328) | 300 (2655) | 650 (5753) | 1780 (15754) | 3600 (31863) | 20 | |
| | | | 55 (487) | 150 (1328) | 300 (2655) | 650 (5753) | 2000 (17701) | 3600 (31863) | 25 | |
| | | | 55 (487) | 150 (1328) | 300 (2655) | 650 (5753) | 2000 (17701) | 3600 (31863) | 35 | |
| | | | 55 (487) | 150 (1328) | 300 (2655) | 650 (5753) | 2000 (17701) | 2970 (26287) | 40 | |
| | | | 55 (487) | 150 (1328) | 300 (2655) | 650 (5753) | 1650 (14604) | 3600 (31863) | 50 | |
| | | | 55 (487) | 89 (788) | 255 (2257) | 600 (5310) | 1390 (12303) | 3230 (28588) | 70 | |
| | | | 24 (212) | 61 (540) | 141 (1248) | 345 (3054) | 740 (6550) | 1830 (16197) | 100 | |

(1) Ratios (i=n₁/n₂)
 (2) Number of stages
 (3) Application specific configuration with NCP – www.neugart.com
 (4) Based on reference clamping system diameter
 (5) Permitted 1000 times

PSFNpro055 PSFNpro110 PSFNpro140
 PSFNpro064 PSFNpro200

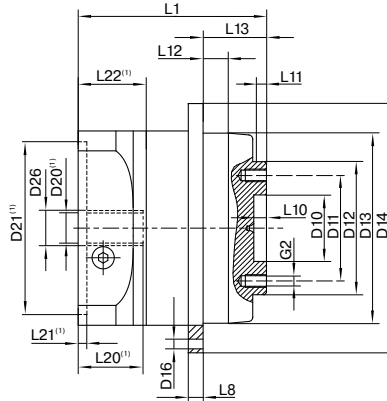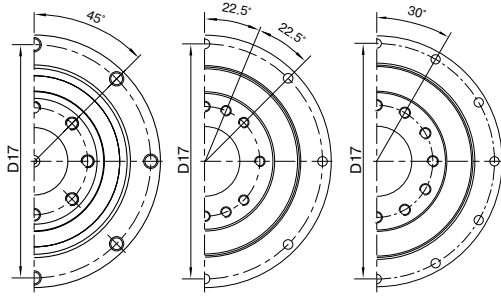

Drawing corresponds to a PSFNpro090 / 1-stage / flange output shaft / 14 mm clamping system / motor adaptation – 2-part – round universal flange / B5 flange type motor

(1) The dimensions vary with the motor/gearbox flange. The input flange dimensions can be retrieved for each specific motor in Tec Data Finder at www.neugart.com

| Geometry ⁽²⁾ | | | PSFNpro 055 | PSFNpro 064 | PSFNpro 090 | PSFNpro 110 | PSFNpro 140 | PSFNpro 200 | p ⁽³⁾ | Code |
|--|-----|----|----------------------------------|--------------|---------------|-------------|-------------|--------------|------------------|----------|
| Centering diameter output shaft | D10 | H7 | 16 (0.630) | 20 (0.787) | 31.5 (1.240) | 40 (1.575) | 50 (1.969) | 80 (3.150) | | |
| Pitch circle diameter output shaft | D11 | | 25 (0.984) | 31.5 (1.240) | 50 (1.969) | 63 (2.480) | 80 (3.150) | 125 (4.921) | | |
| Centering diameter output shaft | D12 | h7 | 34 (1.339) | 40 (1.575) | 63 (2.480) | 80 (3.150) | 100 (3.937) | 160 (6.299) | | |
| Centering diameter output flange | D13 | | 55 (2.165) | 64 (2.520) | 90 (3.543) | 110 (4.331) | 140 (5.512) | 200 (7.874) | | |
| Flange diameter output | D14 | | 72 (2.835) | 86 (3.386) | 118 (4.646) | 145 (5.709) | 179 (7.047) | 247 (9.724) | | |
| Mounting bore output | D16 | | 3.4 8x45° | 4.5 8x45° | 5.5 8x45° | 5.5 8x45° | 6.6 12x30° | 9 12x30° | | |
| Pitch circle diameter output flange | D17 | | 67 (2.638) | 79 (3.110) | 109 (4.291) | 135 (5.315) | 168 (6.614) | 233 (9.173) | | |
| Min. total length | L1 | | 66 (2.598) | 71 (2.795) | 89.5 (3.524) | 108 (4.252) | 142 (5.591) | 172 (6.772) | 1 | |
| | | | 89.5 (3.524) | 99.5 (3.917) | 111.5 (4.390) | 130 (5.118) | 173 (6.811) | 217 (8.543) | 2 | |
| Flange thickness output | L8 | | 4 (0.157) | 4 (0.157) | 7 (0.276) | 8 (0.315) | 10 (0.394) | 12 (0.472) | | |
| Centering depth output shaft | L10 | | 4.1 (0.161) | 4.5 (0.177) | 6.5 (0.256) | 6.5 (0.256) | 6.5 (0.256) | 10 (0.394) | | |
| | L11 | | 3 (0.118) | 3 (0.118) | 6 (0.236) | 6 (0.236) | 6 (0.236) | 7 (0.276) | | |
| Centering depth output flange | L12 | | 8 (0.315) | 10 (0.394) | 12 (0.472) | 12 (0.472) | 14 (0.551) | 17.5 (0.689) | | |
| Output flange length | L13 | | 19.0 | 19.5 | 30.0 | 29.0 | 38.0 | 50.0 | | |
| Motor shaft diameter j6/k6 | D20 | | More information on page 191/192 | | | | | | | |
| Clamping system diameter input | D26 | | More information on page 100 | | | | | | | |
| Flange output shaft (similar ISO 9409-1) | | | | | | | | | | D |
| Number x thread x depth | G2 | | 8 x M4x6 | 8 x M5x7 | 8 x M6x10 | 12 x M6x12 | 12 x M8x15 | 12 x M10x20 | | |
| Flange output shaft with dowel hole (ISO 9409-1) | | | | | | | | | | E |
| Dowel hole x depth | D15 | H7 | 4x5 | 5x5 | 6x6 | 6x6 | 8x8 | 10x10 | | |
| Number x thread x depth | G2 | | 7 x M4x6 | 7 x M5x7 | 7 x M6x10 | 11 x M6x12 | 11 x M8x15 | 11 x M10x20 | | |

⁽²⁾ Dimensions in mm

⁽³⁾ Number of stages