

# Slip rings

<b>Modular</b>	<b>Fieldbus – 100 Mbit/s</b>	<b>SR120</b>
----------------	------------------------------	--------------



In general slip rings are used to transmit power, signals or data and pneumatics, from a stationary to a rotating platform.

The transmission between the stator and rotor takes place via sliding contacts and is extremely reliable.

The slip ring SR120 is ideal for applications requiring high transmission rates. The three chamber system allows parallel transmission of signals, load and data up to 100 Mbit/s.



## Rugged

- Reliable operation in harsh environments.
- Rugged metal housing.
- High protection level IP64.

## Flexible

- Fast and easy installation.
- Modular construction.
- Wide variety of connector and cable connections.

## Reliable with the three chamber system

- Reliable thanks to interference-proof transmission.
- Transmission of Ethernet, signal, load and pneumatics.
- Innovative contact technology, low-maintenance and durable.
- Fieldbus or Ethernet up to 100 Mbit/s.

## Application areas for slip rings

Industrial automation, bottling plants, labelling machines, rotary tables, ...

## Order code

SR120	XX	-	XX	-	XX	-	XX	-	XX	X	X	2	-	V100
Type	a		b		c		d	e	f	g	h	i		k

- a** Flange mounting  
 21 = stator connections axial, rotor connections radial  
 22 = stator connections axial, rotor connections axial
- b** Ethernet transmission  
 00 = none  
 01 = 100 Mbit/s  
 02 = 2x 100 Mbit/s
- c** Number of signal/data channels  
 (0, 2, 4, 6, 8, 10)  
 00 = no signal/data channels  
 02 = 2 signal/data channels  
 ...  
 10 = 10 signal/data channels  
 (other options on request)

- d** Number of PE channels  
 0 = none  
 A = 1 PE channel  
 B = 2 PE channels  
 (other options on request)
- e** Number of load channels  
 0 = none  
 1 = 1 load channel  
 2 = 2 load channels  
 ...  
 9 = 9 load channels  
 A = 10 load channels  
 B = 11 load channels  
 (other options on request)
- f** Max. load current  
 0 = no load channel  
 1 = 16 A, 240 V AC/DC  
 2 = 25 A, 240 V AC/DC  
 3 = 10 A, 400 V AC/DC  
 4 = 20 A, 400 V AC/DC

- g** Type of connection  
 A = cable 1 m  
 B = cable 2 m (standard)  
 C = cable 3 m  
 D = cable 5 m  
 E = cable 10 m
- h** Media rotary feedthrough  
 0 = none  
 A = central bore  
 Air, rotation screw connection  
 C = tube Ø 12 mm  
 D = tube Ø 10 mm  
 E = tube Ø 8 mm
- i** Protection  
 2 = IP64
- k** Version number (options)  
 V100 = standard

# Slip rings

<b>Modular</b>	<b>Fieldbus – 100 Mbit/s</b>	<b>SR120</b>
<b>Cables and connectors</b>		Order no.
<b>Preassembled cables</b>	M12 male connector with external thread, 4-pin, straight 2 m [6.56'] PUR cable	<b>05.00.6031.4411.002M</b>
<b>Connectors</b>	M12 male connector with external thread, 4-pin, straight	<b>05.WASCSY4S</b>

Further Kübler cables and connectors can be found at: [kuebler.com/connection-technology](http://kuebler.com/connection-technology)

Technical data	
<b>Overall length</b>	dep. on the number of transmission paths
<b>Type of connection</b> (stator and rotor)	load cable 2 m [6.56'] signal / data cable 2 m [6.56'] Ethernet M12 connector 4-pin, D coded
<b>Material pairing</b>	load copper / brass signal / data silver / precious metal Ethernet silver / precious metal
<b>Voltage/current loading</b>	load channels max. 10 A, 400 V AC/DC max. 16 A, 240 V AC/DC max. 25 A, 240 V AC/DC max. 20 A, 400 V AC/DC signal channels max. 2 A, 48 V AC/DC
<b>Contact resistance</b>	load channels $\leq 1 \text{ Ohm}$ (dynamic) <sup>1)</sup> signal / data channels $\leq 0.1 \text{ Ohm}$ (silver / precious metal) <sup>2)</sup>
<b>Insulation resistance</b>	$10^3 \text{ MOhm}$ , at 500 V DC
<b>Dialectric strength</b>	1000 V eff. (60 sec.)
<b>Speed max. (signal / data channels)</b>	300 min <sup>-1</sup> (depends on installation position and numbers of channels)
<b>Service life (signal / data channels)</b>	typ. 500 million revolutions <sup>3)</sup> (at room temperature) depends on installation position
<b>Maintenance cycles</b>	maintenance free (if necessary all 100 million revolutions)
<b>Operating temperature</b>	-35 °C ... +85 °C [-31 °F ... +185 °F]
<b>Protection acc. to EN 60529</b>	max. IP64

Approvals
<b>CE compliant</b> in accordance with Low Voltage Directive 2014/35/EU

1) Voltage measurement, ambient temperature, DC series connection, ohmic load, min. 4 A test current.

2) 2-wire resistance measurement, ambient temperature, 6.5-digit digital multimeter or similar, values without testing cable.

3) Typical values, may vary considerably depending on installation situation and application.

# Slip rings

<b>Modular</b>	<b>Fieldbus – 100 Mbit/s</b>	<b>SR120</b>
----------------	------------------------------	--------------

## Terminal assignment


M12 connector, 4-pin					
Signal:	Transmit data +	Receive data +	Transmit data -	Receive data -	
Abbreviation:	TxD+	RxD+	TxD-	RxD-	
Pin:	1	2	3	4	

## Dimensions

Dimensions in mm [inch]

### Standard version

Example: Type SR120-02-01-02-03-2002-V100

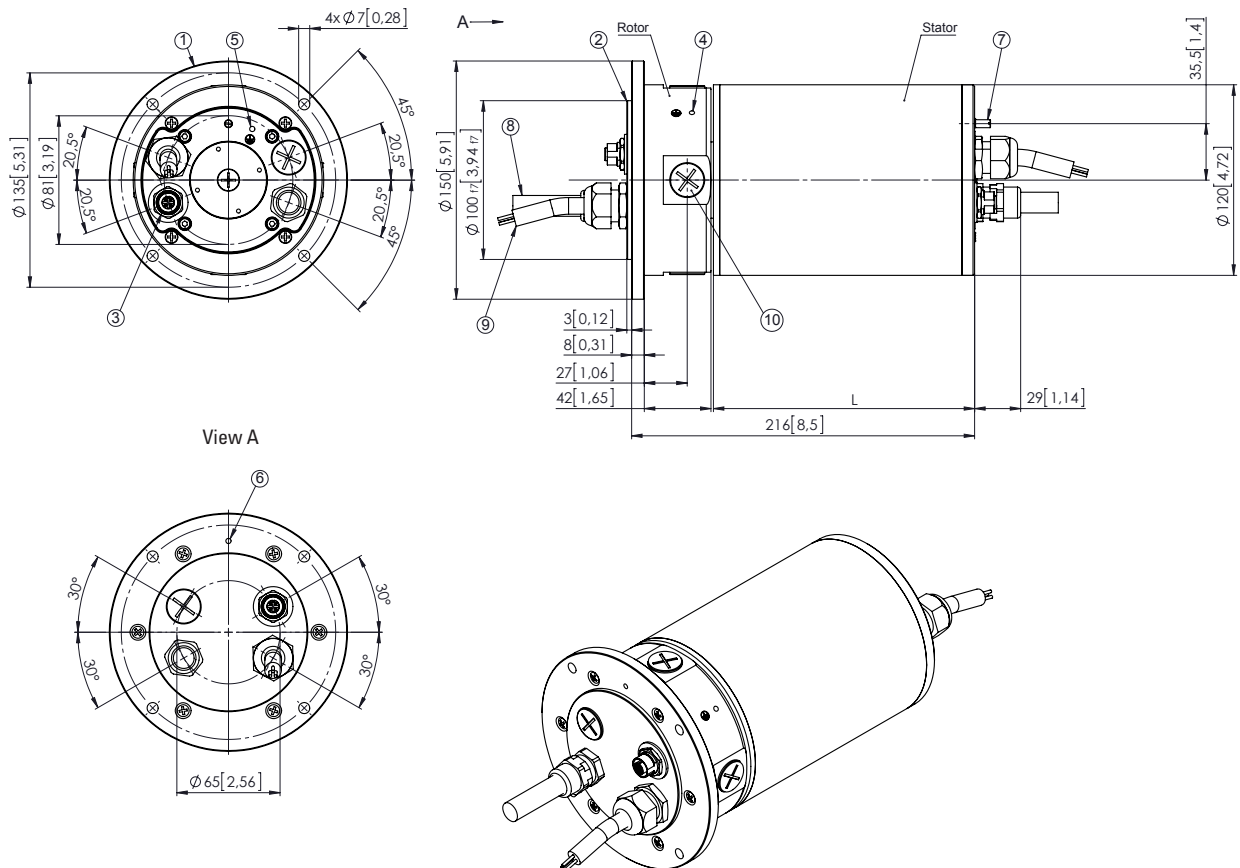

- |  |                                       |   |
|--|---------------------------------------|---|
| 1 – Mounting flange  | 4 – Ground PE (optional connectivity) | 8 – 2 m [6.56'] connecting cable for load transmission                      |
| 2 – Centering diameter   | 5 – Ground PE (optional connectivity) | 9 – 2 m [6.56'] connecting cable for signal transmission                    |
| 3 – M12 female connector (4-pin)<br>Ethernet (data transmission) (D-coded) | 6 – Ground PE (optional connectivity) | 10 – Blind plug – depending on order code rotor<br>connections exit axially |
|  | 7 – Anti-rotating-pin                 |   |